


Green Triplex PM250M01

Mono-Crystalline
Photovoltaic Module

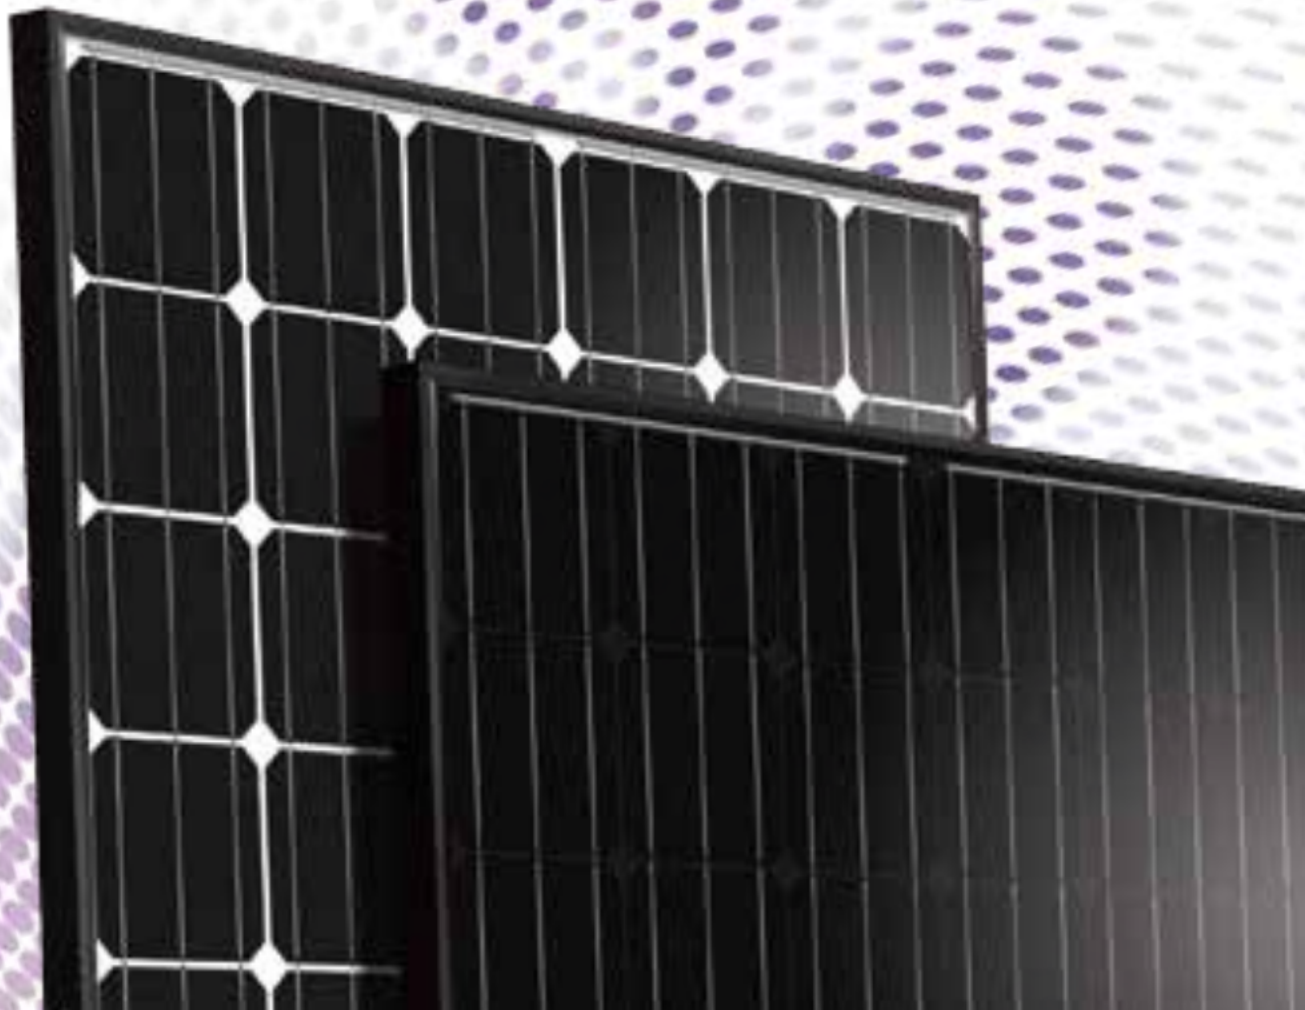

GreenTriplex PM250M01 (255 ~ 280 Wp)

Electrical Data

Typ. Nominal Power P_n	255 W	260 W	265 W	270 W	275 W	280 W
Typ. Module Efficiency	15.8%	16.1%	16.4%	16.8%	17.1%	17.4%
Typ. Nominal Voltage V_{mp} (V)	30.3	30.8	31.3	31.8	32.3	32.7
Typ. Nominal Current I_{mp} (A)	8.42	8.45	8.47	8.50	8.52	8.57
Typ. Open Circuit Voltage V_{oc} (V)	37.8	38.0	38.2	38.5	38.7	38.9
Typ. Short Circuit Current I_{sc} (A)	8.94	8.96	8.98	9.01	9.03	9.06
Maximum Tolerance of P_n	0 / +3%					

- * Above data are the effective measurement at Standard Test Conditions (STC)
- * STC: irradiance 1000 W/m², spectral distribution AM 1.5, temperature 25 ± 2 °C, in accordance with EN 60904-3
- * The given electrical data are nominal values which account for basic measurements and manufacturing tolerances of ±10% with the exception of P_n . The classification is performed according to P_n .

Temperature Coefficient

NOCT	46 ± 2 °C
Typ. Temperature Coefficient of P_n	-0.44% / K
Typ. Temperature Coefficient of V_{oc}	-0.30% / K
Temperature Coefficient of I_{sc}	0.06% / K

- * NOCT: Normal Operation Cell Temperature, measuring conditions: irradiance 800 W/m², AM 1.5, air temperature 20 °C, wind speed 1 m/s

Mechanical Characteristics

Dimensions (L x W x H)	1639 x 983 x 40 mm (64.53 x 38.70 x 1.57 in)
Weight	18.5 kg (40.79 lbs)
Front Glass	High transparent solar glass (tempered), 3.2 mm
Cell	60 monocrystalline solar cells, 156 x 156 mm (6 x 6 in)
Cell Encapsulation	EVA
Back Sheet	Composite film
Frame	Anodized aluminum frame
Junction Box	IP-67 rated with 3 bypass diodes
Connector Type & Cables	TE Connectivity PV4 : 1x 4 mm ² (0.04 x 0.16 in ²), Length: each 1.0m (39.37 in) YUKITA YS254/ YS255 : 1x 4 mm ² (0.04 x 0.16 in ²), Length: each 1.065m (41.93 in)

Operating Conditions

Operating Temperature	-40 ~ +85 °C
Ambient Temperature Range	-40 ~ +45 °C
Max. System Voltage IEC/UL	1000 V / 1000 V
Serial Fuse Rating	15 A
Maximum Surface Load Capacity	Tested up to 5400 Pa according to IEC 61215 (advanced test)

Warranties and Certifications

Product Warranty	Maximum 10 years for material and workmanship
Performance Guarantee	Guaranteed linear degradation to 80% for 25 years *1
Certifications	According to IEC/EN 61215, IEC/EN 61730 and UL 1703 guidelines *2


*1: Please refer to warranty letter for detail

*2: Please confirm other certifications with official dealers


Packing Configuration

Container	20' GP	40' GP	40' HQ
Pieces per Pallet	26	26	26
Pallets per Container	6	14	28
Pieces per Container	156	364	728

Dimensions mm (inch)

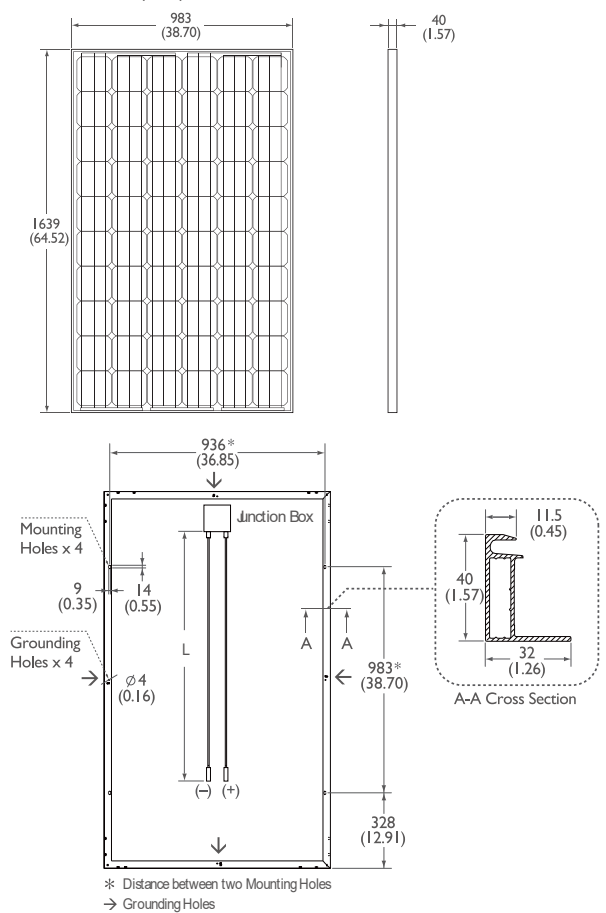

I-V Curve

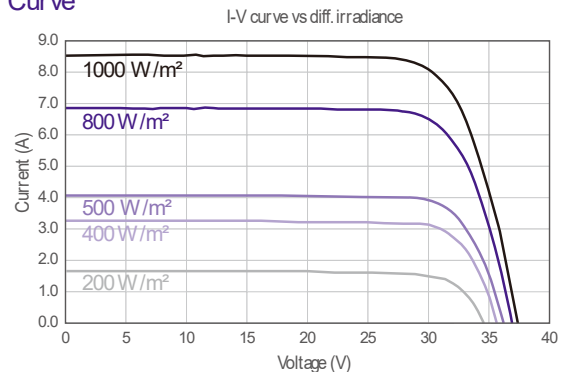

Current/voltage characteristics with dependence on irradiance and module temperature.

Dealer Stamp



AU Optronics Corporation

No. 1, Li-Hsin Rd. 2, Hsinchu Science Park, Hsinchu 30078, Taiwan
Tel: +886-3-500-8899 www.BenQSolar.com



BenQ Solar is a division of AU Optronics. This datasheet is printed with Soy Ink.
© Copyright July 2014 AU Optronics Corp. All rights reserved. Information may change without notice.



BenQ
Solar